

WINMAN Hava Kontrollü Pnömatik Valf (3/2 yollu) / Air Control Pneumatic Valve (3/2 way)

Temperature

Max. frequency [Note 3]

3A300 Serisi / 3A300 Series



Özellikler / Speci	ellikler / Specification							
Model	3A310-08	3A320-08		3A310-10	3A320-10			
Fluid	Air	Air (to be filtered by 40 μ m filter element)						
Acting		Exterior control						
Port size [Note1]	In=Out	In=Out=1/4"		In=Out=3/8"				
Orifice size	25.0mm² (Cv =	25.0mm² (Cv = 1.39)		30.0mm ² (Cv = 1.67)				
Valve type		3 port 2 position						
Lubrication [Note2]		Not required						
Operating pressure		0.15~0.8MPa(21~114psi)						
Proof pressure		1.2MPa(175psi)						

Sembol /Symbol







[Note1] PT thread, G thread and NPT thread are available.

[Note2] Once lubricated air is used, continue with same medium to optimise valve life span.Lubricants like ISO VG32 or equivalent are recommended.

Aluminum alloy


5 cycle/sec

[Note3] The maximum actuation frequency is in the no-load state.


Ürün Özelliği / Product Feature

- 1. Structure in sliding column mode: good tightness and sensitive reaction.
- 2. Double air control valves have memory function.
- Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life.
- 4. No need to add oil for lubrication.5. Multi-mounting helps to install and apply.
- 6. Integrate with the manifold to save installation space.

Akış Şeması / Flow Chart





Sipariş Kodu/ Ordering Code

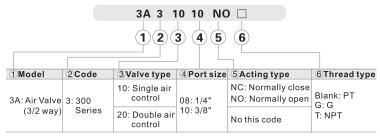

Please refer to 107 for manifold specification and the order way.

İç Yapı / Inner Structure





No.	Item	No.	Item	
1	Bottom cover gasket	7	O-ring	
2	Spring	8	Wear ring	
3	Bottom cover	9	Piston	
4	Bottom cover screw	10	Pilot body	
5	Spool	11	Piston O-ring	
6	Body	12	Piston screw	

Boyutlar / Dimensions

