


SOV1490 Pressure Gauge 90 Shut-off Valve

Technical data

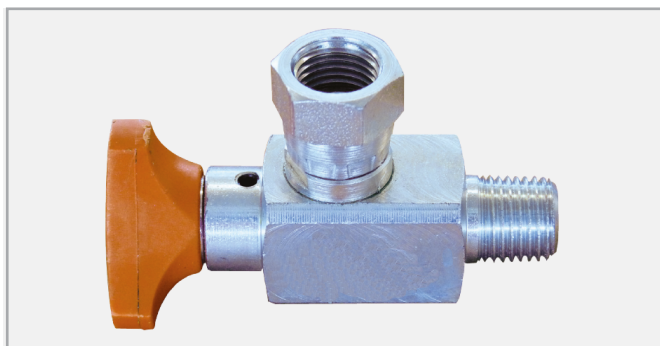

| | | |
|-------------------------------------|--|---------------------|
| Mineral oil | ISO 6743/4 - DIN 51524 | |
| Fluid viscosity | 10 - 50mm ² /s 45 to 2000 ssu (6 to 420 cSt) | |
| Max contamination index with filter | ISO 4406:1999 Classe 19/17/14 | |
| Fluid temperature | -20 ^o C | +80 ^o C |
| | -4 ^o F | +176 ^o F |
| Ambient temperature | -20 ^o C | +50 ^o C |
| | -4 ^o F | +122 ^o F |

It is necessary a filter use to protect the valve (adsived filtration 15 micron)

Technical performances

Ordering code

| Code | Max pressure bar/PSI | Approx weight Kg/lb |
|---------|-------------------------|------------------------|
| SOV1490 | 400 (5800) | 0,15 (0.33) |

SOV1490

