

Stainless Steel Compression Fittings

SKL SERIES




Product features

- The materials ensure Anti-Corrosion highly, all of them are made from SUS316L except the seal ring
- FKM is used as the seal ring, which can ensure Anti-Corrosion and acid resistant, also can be used in high temperature
- It's widely applied in the range of industry such as oil refining, chemical, oil natural gas, food service industry, pharmaceutical and other industry because of the various advantages as strong connecting, good sealing, high pressure proof, simple structure, convenient using and no welding, which can also be applied to the hydraulic transmission line like all kinds of mechanical engineering and machine tool equipment

Speciality

Fluid	Oil, Water, Steam
Operating Pressure	0~5 MPa
Operating Temperature	-40°C~140°C
Applicable Tube	Soft metal Tube

Dimension

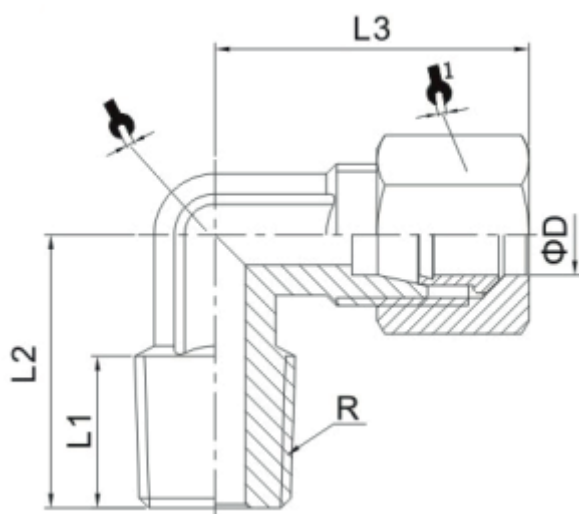

MODEL	ØD	R	L1	L2	L3		¹
SKL04-01	4	R1/8	8.5	17	22	9	10
SKL06-01	6	R1/8	8.5	19	29	10	14
SKL06-02	6	R1/4	12.5	23.5	29	10	14
SKL08-01	8	R1/8	8.5	20	31	12	17
SKL08-02	8	R1/4	12.5	24.5	31	12	17
SKL08-03	8	R3/8	13	26	31	12	17
SKL10-02	10	R1/4	12.5	26	33	14	19
SKL10-03	10	R3/8	13	26	33	14	19
SKL10-04	10	R1/2	17	30	33	14	19
SKL12-02	12	R1/4	12.5	27	34	16	22
SKL12-03	12	R3/8	13	27	34	16	22
SKL12-04	12	R1/2	17	31	34	16	22