

## Quick Connecting Tube Fittings

### WPHT-G(3) SERIES




#### Product features

- One-Touch tube fittings are used in pneumatics piping.
- The tube fittings come in wide variety of models to meet all your needs in pneumatics piping.
- Even after installation, in direction of the tube can be changed freely.
- Nickel-plated metal body ensures Anti-Corrosion and Anti-Contamination.
- All R and NPT threads are Pre-Costed sealant.
- All cylindrical threads are standard with O-Ring seals.

#### Speciality

Fluid	Air, Vacuum
Operating Pressure	0-1.0MPa (150 psi)
Negative Pressure	-100KPa(-29.5 in-Hg)
Max Pressure	1.5MPa
Operating Temperature	0-60°C(32-140°F)
Applicable Tube	Polyurethane and Nylon

#### Dimension

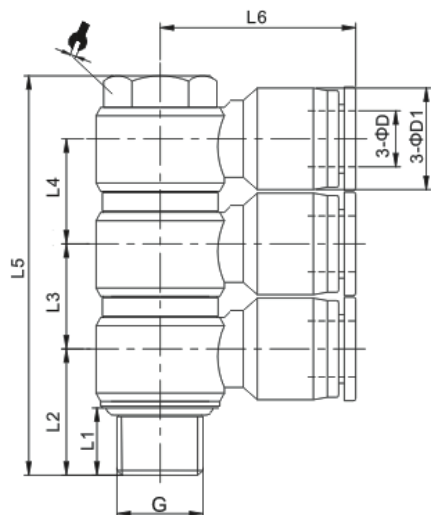

MODEL	$\phi D$	G	L1	L2	L3	L4	L5	L6	$\phi D1$	
WPHT04-G01(3)	4	G1/8	5.5	14	15	15	53	23.5	11.5	12
WPHT04-G02(3)	4	G1/4	7.5	17.3	15	15	56.3	25.5	11.5	14
WPHT06-G01(3)	6	G1/8	5.5	14	15	15	53	23.5	13.5	12
WPHT06-G02(3)	6	G1/4	7.5	17.3	15	15	56.3	25.5	13.5	14
WPHT06-G03(3)	6	G3/8	7.5	19	15.7	15.7	64.4	29.5	13.5	19
WPHT08-G01(3)	8	G1/8	5.5	15	15	15	53	26.5	15	12
WPHT08-G02(3)	8	G1/4	14	18.3	15	15	56.3	29	15	14
WPHT08-G03(3)	8	G3/8	17	19	15.7	15.7	64.4	30	15	19
WPHT08-G04(3)	8	G1/2	10	24.5	21.5	21.5	82	32.5	15	24
WPHT10-G01(3)	10	G1/8	5.5	16.8	19	19	61.5	30.5	19	12
WPHT10-G02(3)	10	G1/4	7.5	20	21.5	21.5	69.3	32.5	19	14
WPHT10-G03(3)	10	G3/8	7.5	21	21.5	21.2	75.4	33	19	19
WPHT10-G04(3)	10	G1/2	10	25	21.5	21.5	82	36	19	24
WPHT12-G02(3)	12	G1/4	7.5	21.5	21.5	21.5	69.3	33.5	21.5	14
WPHT12-G03(3)	12	G3/8	7.5	22	21.5	21.2	75.4	35.5	21.5	19
WPHT12-G04(3)	12	G1/2	10	26	21.5	21.5	82	36.5	21.5	24