


WT-58 SERIES




DIMENSION

WT-58N, WT-58P / WT-58N-QD, WT-58P-QD

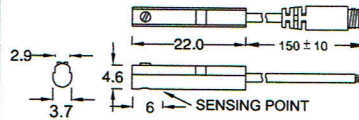


WT-58R, WT-58RP / WT-58R-QD, WT-58RP-QD

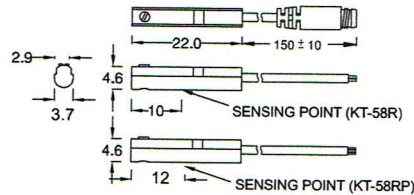


Unit:mm

QD PINOUT


*3 wire QD wiring



*2 wire QD wiring



*2 wire EQD wiring




SPECIFICATION

TYPE	WT-58R	WT-58N	WT-58P	WT-58RP
CONNECT DIAGRAM				
CHARACTERISTICS				
WIRING METHOD	2-Wire Type	3-Wire Type		
SWITCHING LOGIC	SPST, Normally Open	Solid State Output, Normally Open		SPST, Normally Open
SENSOR TYPE	Reed Switch	NPN Current Sinking	PNP Current Sourcing	Reed Switch
OPERATING VOLTAGE	5~120V DC/AC	10~30V DC		10~30V DC/AC
SWITCHING CURRENT	100 mA max.	200 mA max.		500 mA max.
CONTACT RATING (NOTE 1)	10 W max.	6 W max.		10 W max.
CURRENT CONSUMPTION	--	10 mA @ 24V DC max.		5 mA @ 24V DC max.
VOLTAGE DROP	3.5 V max.	0.5 V @ 50mA max.		0.1 V @ 100mA max.
LEAKAGE CURRENT	--	0.01 mA max.		--
INDICATOR	Yellow LED	Red LED	Yellow LED	
CABLE	ø2.5, 2C, PUR	ø2.5, 3C, PUR		
OPERATING FREQUENCY	200 Hz	1000 Hz		200 Hz
MAGNET REQUIREMENT (NOTE 2)	65 Gauss	40 Gauss		
TEMPERATURE RANGE		-10~70°C		
SHOCK (NOTE 3)	30 G	50 G		30 G
VIBRATION (NOTE 4)		9 G		
ENCLOSURE CLASSIFICATION		IEC 529 IP 67		
PROTECTION CIRCUIT (NOTE 5)	1	3,4		1

NOTE:

1. **WARNING:** Never exceed rating (Watt=Voltage x Amperage). Permanent damage to sensor will occur.
2. Measuring standard target: ø15.5Xø8X5t (Anisotropy rubber magnet)
3. Sin wave / X, Y, Z 3 directions / 3 times each direction / 11 ms each time.
4. Double amplitude 1.5 mm / 10Hz~55Hz~10Hz (Sweep 1 min) / X, Y, Z 3 directions / 1 hour each time.
5. 1=None / 2=Short-circuit / 3=Power Source Reverse polarity / 4=Surge Suppression

GROOVE DIMENSION

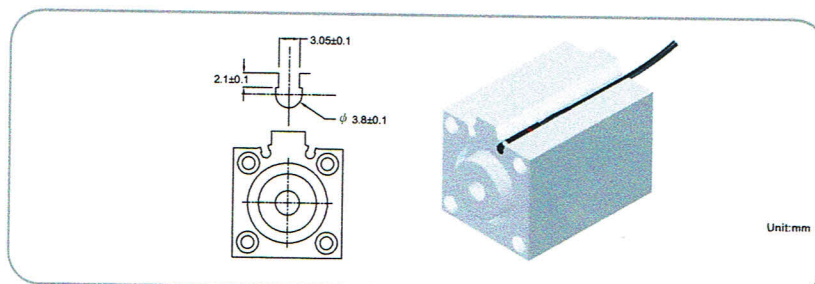

Unit:mm