



WWT SERIES CARTRIDGE THROTTLE VALVES

WWT-02 Series






Specifications


Model Number	Max. Pressure (bar)	Max. Flow (lpm)	Weight (Kg)
WWT-02	350 (5076 psi)	35(9.25 gpm)	0.16(0.35 lbs)
Fluid Type		ISO VG 32, 46, 68	
Viscosity cSt		10~400 (59~1854 SSU)	
Operating Temperature		-15∼70 (-5∼158°F)	
Contamination Level		ISO4406.21/19/16 NAS1638,10	

How To Order

Control Port (S)



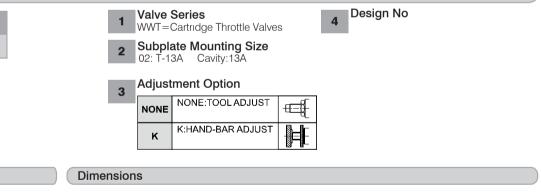


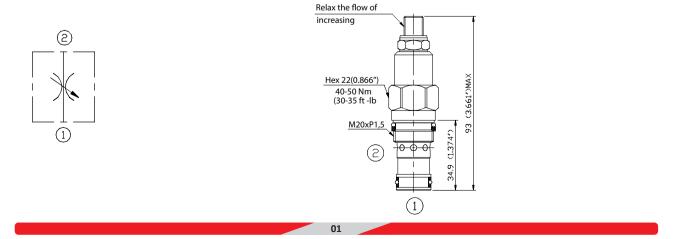




WWT SERIES CARTRIDGE THROTTLE VALVES

WWT-03 Series






Specifications

Model Number	Max. Pressure (bar)	Max. Flow (Ipm)	Weight (Kg)
WWT-03	350 (5076 psi)	50 (13.21 gpm)	0.3(0.66 lbs)
Fluid Type		ISO VG 32, 46, 68	
Viscosity cSt		10~400 (59~1854 SSU)	
Operating Temperature		-15~70 (-5~158°F)	
Contamination Level		ISO4406.21/19/16 NAS1638,10	

How To Order








4 Design No



Dimensions

3

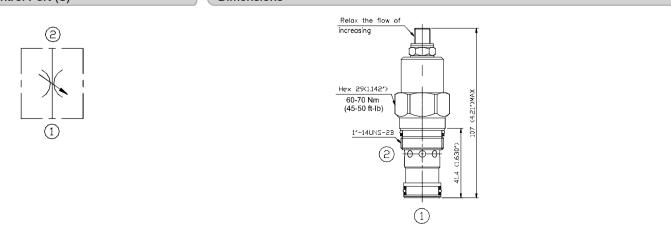

02



WWT SERIES CARTRIDGE THROTTLE VALVES

WWT-06 Series

Through Check Valve


21

14

0


bar

PRESSURE 4



Specifications

Model Number	Max. Pressure (bar)	Max. Flow (Ipm)	Weight (Kg)
WWT-06	350 (5076 psi)	160 (42.27 gpm)	0.6(1.32 lbs)
Fluid Type		ISO VG 32, 46, 68	
Viscosity cSt		10~400 (59~1854 SSU)	
Operating Temperature		-15~70 (-5~158°F)	
Contamination Level		ISO4406.21/19/16 NAS1638,10	




40


80

FLOW

120

160



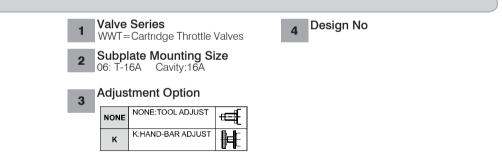

Control Port (S)

Dimensions

